



LI DE HENG ELECTRONICS


M1 thru M7

1.0 A Surface Mount Silicon Rectifier
Rectifier Reverse Voltage 50 to 1000V

SMA / DO-214AC

Features

- Ideal for surface mount application
- Surge overload rating to 30A peak
- Plastic material has UL recognition flammability classification 94V-0
- Built-in strain relief

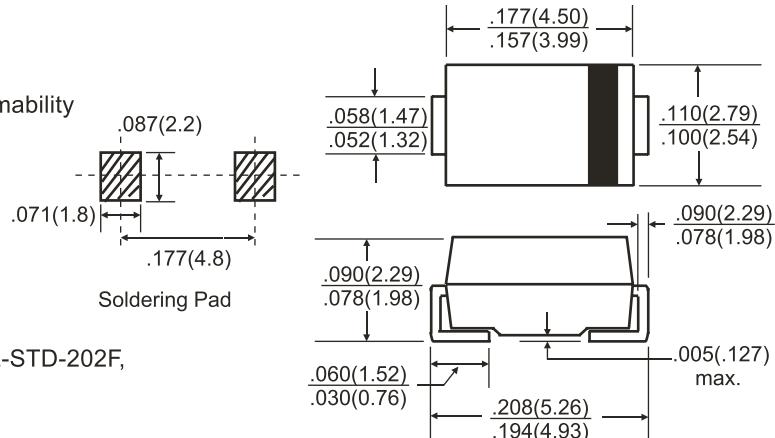

Mechanical Data

Case: Molded plastic

Terminals: Solder plated solderable per MIL-STD-202F,
Method 208

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.063grams (approx)

All dimensions inches and (millimeters)

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
For Capacitive load derate current by 20%.

Parameter	Symbol	M1	M2	M3	M4	M5	M6	M7	unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at TA=100°C	IF(AV)				1.0				A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM				30.0				A
Typical thermal resistance per element(1)	ReJA				28				°C/W
Typical junction capacitance per element (2)	C _j				10				pF
Operating junction and storage temperature range	T _J , T _{STG}				-65 to + 150				°C

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.
For Capacitive load derate by 20 %.

Parameter	Symbol	M1	M2	M3	M4	M5	M6	M7	Unit
Maximum instantaneous forward voltage drop per leg at 1.0A	VF				1.1				V
Maximum DC reverse current at rated TA =25°C DC blocking voltage per element TA =125°C	IR				5.0				μA

Notes: (1)Thermal resistance from Junction to Ambemton P.C.board mounting.

(2)Measured at 2.0MHz and applied reverse voltage of 4.0 volts.

Rating and Characteristic Curves (TA=25°C Unless otherwise noted)
M1 thru M7

Fig. 1 Derating Curve for Output Rectified Current

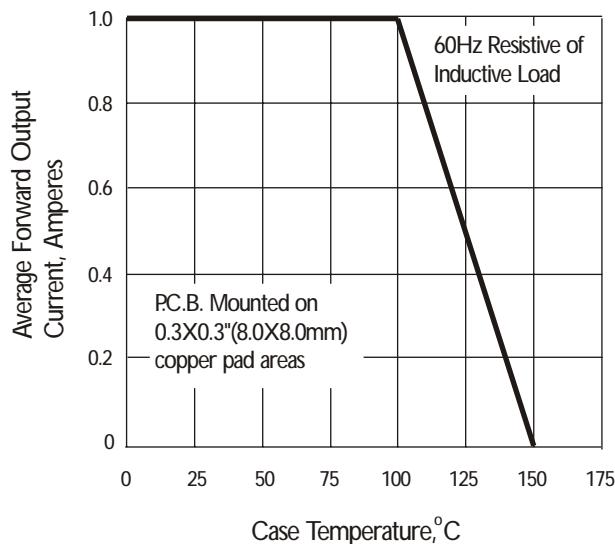


Fig. 3 Typical Instantaneous Forward Characteristics

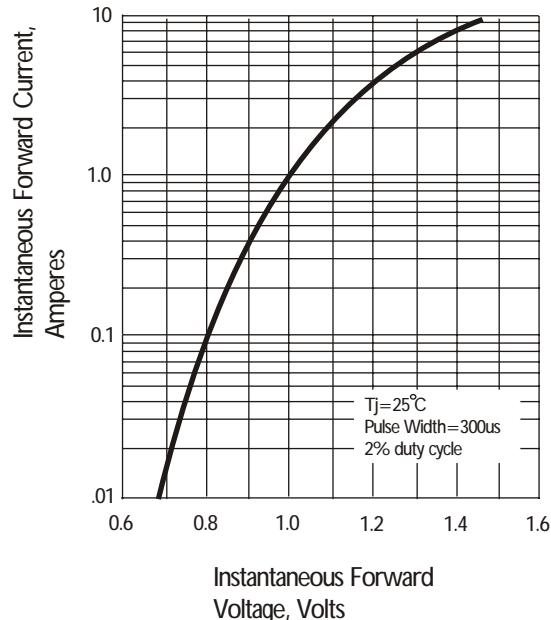


Fig. 2 Maximum Non-repetitive Peak Forward Surge Current

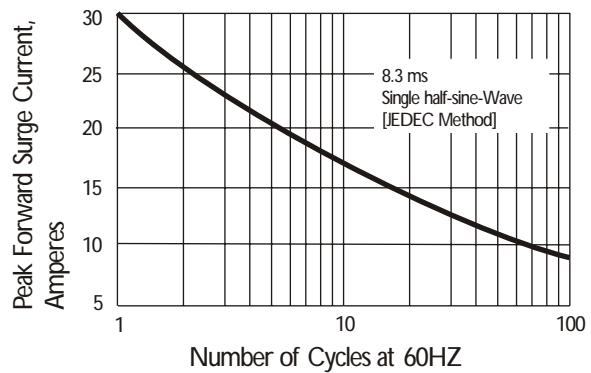


Fig. 4 Typical Reverse Characteristics

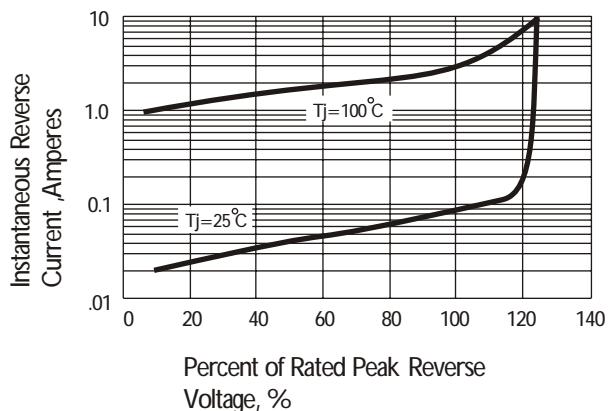


Fig. 5 Typical Junction Capacitance

