




8.0 A Single-Phase Silicon Bridge Rectifiers
Rectifier Reverse Voltage 50 to 1000V

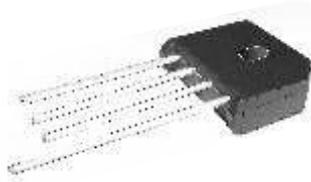


Features

- This series is UL listed under the Recognized Component Index, file number E142814
- Single In-Line terminals array suitable for P.C. board mounting
- Surge overload ratings to 300 amperes peak
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- High temperature soldering guaranteed 265 C/10 seconds/.375"(9.5mm) lead length at 5 lbs (2.3kg) tension

Mechanical Data

Case: Molded plastic
 Terminals: Plated wire leads solderable per MIL-STD-202, Method 208
 Mounting Position: Any
 Mounting Torque: 5 in-lb maximum
 Weight: 0.3 ounce, 8 grams (approx)

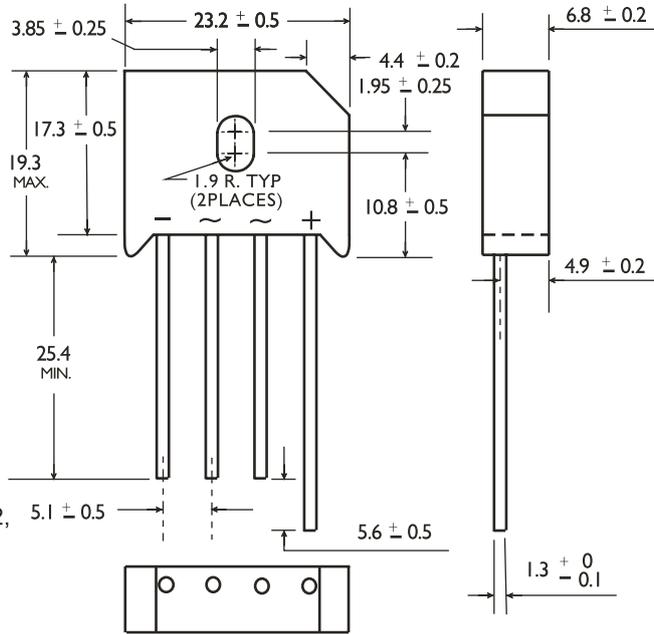

Dimensions in millimeters(1mm =0.0394")

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
 For Capacitive load derate current by 20%.

| Parameter | Symbol | RS801 | RS802 | RS803 | RS804 | RS805 | RS806 | RS807 | unit |
|--|-----------------------------------|--------------|-------|-------|-------|-------|-------|--------------------|------|
| Maximum repetitive peak reverse voltage | VRRM | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS bridge input voltage | VRMS | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC blocking voltage | VDC | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum average forward rectified output current at T _C =100°C T _C =45°C | IF(AV) | 8.0 6.0 | | | | | | A | |
| Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method) | IFSM | 300 | | | | | | A | |
| Rating for fusing (t<8.3ms) | I ² t | 373 | | | | | | A ² sec | |
| Typical thermal resistance per element(1) | ReJA | 2.5 | | | | | | °C / W | |
| Operating junction and storage temperature range | T _J , T _{STG} | -55 to + 150 | | | | | | °C | |

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.
 For Capacitive load derate by 20 %.

| Parameter | Symbol | RS801 | RS802 | RS803 | RS804 | RS805 | RS806 | RS807 | Unit |
|--|----------------|------------|-------|-------|-------|-------|-------|-------|------|
| Maximum instantaneous forward voltage drop per leg at 8.0A | V _F | 1.1 | | | | | | V | |
| Maximum DC reverse current at rated DC blocking voltage per element T _A =25°C T _A =125°C | I _R | 10 1000 | | | | | | μA | |

Notes: (1)Thermal resistance from Junction to Ambient on P.C.board mounting.

Rating and Characteristic Curves ($T_A=25^{\circ}\text{C}$ Unless otherwise noted) RS801 thru RS807

Fig. 1 Derating Curve for Output Rectified Current

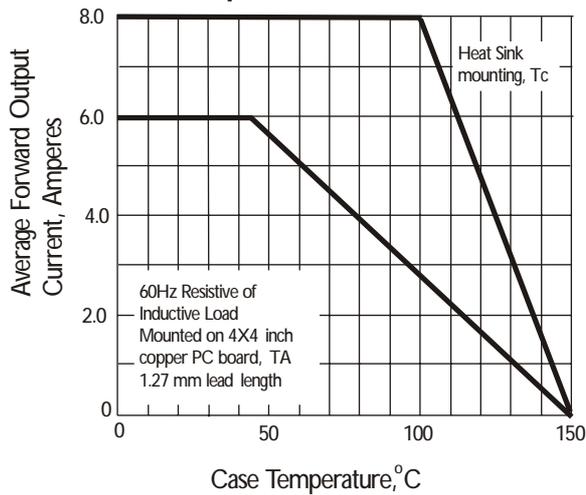


Fig. 2 Maximum Non-repetitive Peak Forward Surge Current

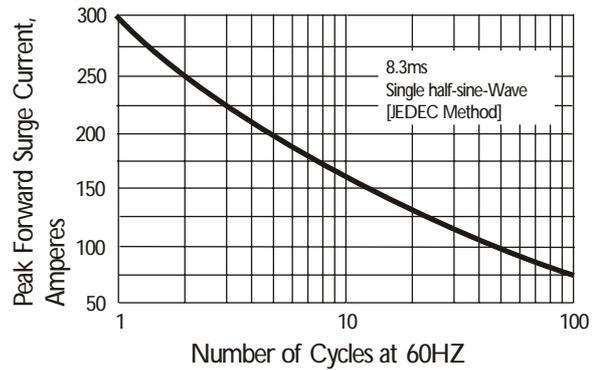


Fig. 3 Typical Instantaneous Forward Characteristics

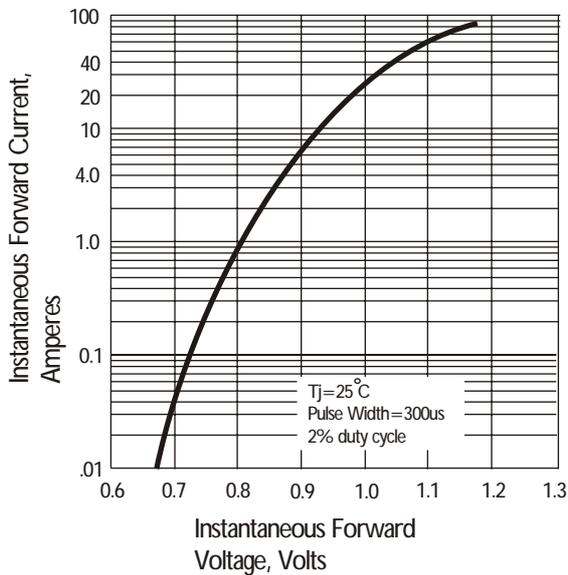


Fig. 4 Typical Reverse Characteristics

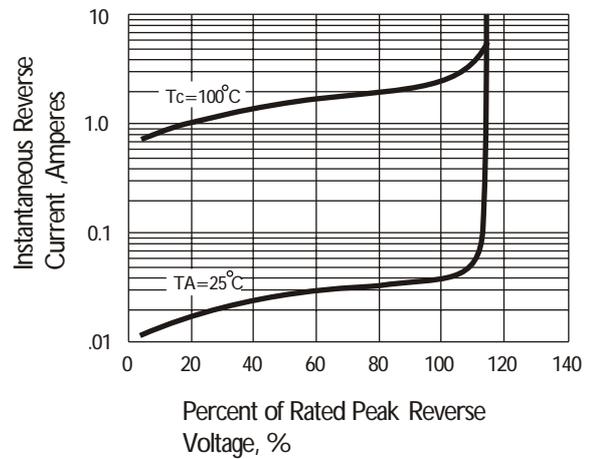


Fig. 5 Typical Junction Capacitance

